

SCAN



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 006 010 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
07.06.2000 Bulletin 2000/23

(51) Int. Cl.<sup>7</sup>: B60C 23/04

(21) Application number: 99121847.0

(22) Date of filing: 04.11.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Koch, Russell W.  
Hartville OH 44632 (US)  
• Wilson, Paul B.  
Murfreesboro TN 37129 (US)

(30) Priority: 04.12.1998 US 206042

(74) Representative:  
Fleck, Thomas, Dr. Dipl.-Chem.  
Raffay & Fleck, Patentanwälte,  
Postfach 32 32 17  
20117 Hamburg (DE)

(71) Applicant:  
BRIDGESTONE/FIRESTONE, INC.  
Akron, Ohio 44317 (US)

(54) Method of attaching sensitive electronic equipment to the inner surface of a tire

(57) An attachment (30) between a monitoring device (32) and an innerliner of a tire (10) includes the use of an epoxy adhesive that bonds the monitoring device (32) directly to the inner surface (26) of the innerliner (24) of the tire. The innerliner (24) is first roughened in a manner that provides a roughened portion of the innerliner without removing the entire thickness of the innerliner. The entire thickness of the innerliner is not removed because the innerliner is preferably more than 1/16 of an inch thick. The thickness of the innerliner allows the rigid cured epoxy to bond the monitoring device to the inner surface of the innerliner while allowing the innerliner to flex with the tire so as to not break the seal between the rigid epoxy and the innerliner. The monitoring device is preferably located at a low flex area (28) of the tire to help avoid the problem of the innerliner flexing.

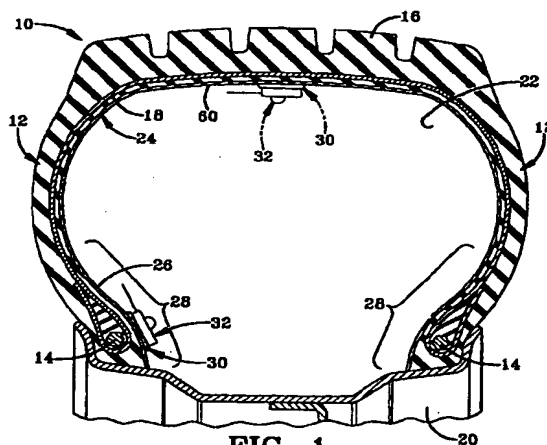


FIG-1

EP 1 006 010 A2

## Description

### BACKGROUND OF THE INVENTION

#### Technical Field

[0001] The present invention relates generally to pneumatic tires and devices that are adhered to pneumatic tires to monitor the conditions of the tires. More particularly, the present invention is related to the connection of the monitoring device to the tire. Specifically, the present invention relates to the method of attaching and the attachment of a monitoring device to the inner surface of a pneumatic tire using a surface preparation and an adhesive.

#### Background Information

[0002] It is desired in the art to monitor the conditions of tires while they are installed and in use on a particular vehicle. It is particularly desirable to measure tire wear, internal temperature, and internal pressure. Other desirable measurements may be the number of tire rotations that have occurred in given time. These measurements are preferably capable of being taken while the tire is in use without having to remove the tire from the vehicle or otherwise interrupt the use of the vehicle to take the measurements. It is particularly desirable to monitor the conditions and statistics on large off-the-road truck tires because the off-the-road tires are expensive and subject to harsher conditions than typical passenger car tires. The off-the-road tires on large trucks and other vehicles also must be regularly maintained to maximize vehicle efficiency. It is also desirable to monitor the tires of certain on road trucks and buses.

[0003] Numerous types of such monitoring devices are known in the art. One type of known monitoring device uses a passive integrated circuit embedded within the body of the tire that is activated by a radio frequency transmission that energizes the circuit by inductive magnetic coupling. Other prior art devices used for monitoring tire conditions include self-powered circuits that are positioned external of the tire, such as at the valve stem. Other active, self-powered programmable electronic devices are disclosed in U.S. Patents 5,500,065, 5,573,610, 5,562,787, and 5,573,611 which are assigned to the assignee of the present application.

[0004] One problem common to each of these monitoring devices is the problem of attaching the monitoring device to the tire. The attachment problem is difficult when the monitoring device is attached to the inside surface of the tire, the outside surface of the tire, or imbedded within the body of the tire. The attachment problem is difficult because the forces on the electronic device are significant and numerous. Tires not only are subjected to rotational forces when the vehicle is moving but also are subjected to various impact forces when the tire contacts bumps or surface irregularities. The

attachment of the monitoring device to the tire must be strong enough and secure enough to maintain the position of the monitoring device with respect to the tire while experiencing all of these forces while also protecting the monitoring device from damage resulting from these forces.

[0005] Another problem with the attachment of a monitoring device to a tire is that the tire must be balanced about its rotational axis to efficiently perform. The monitoring device itself already adds weight to the tire that may require the tire to be counterbalanced. It is thus desired to minimize the weight of the attachment so that additional counterbalancing weights do not have to be added to the tire. It is thus desired to provide an attachment that is strong and secure while being small and lightweight.

[0006] Another problem experienced with attaching a monitoring device to a pneumatic tire is that the surface where the monitoring device is being anchored is often not stable. Tires are designed to flex and stretch to accommodate various pressures and forces. The attachment of the monitoring device to the tire must accommodate the movement and stretching of the tire surface where the monitoring device is connected. Such accommodation must last throughout the life of the tire and function at a wide range of temperatures and pressures. In the patents listed above, the monitoring devices are held in a pocket that is formed with a piece of material connected to the innerliner of the tire. Although these pockets function for their intended purposes, the construction of the pockets increases the counterbalancing problem and increase the complexity of the assembly steps.

[0007] A further problem experienced in connecting a monitoring device to a pneumatic tire is that tires are manufactured on automated assembly lines. The attachment method must be able to be relatively easily engineered into the existing automated tire assembly lines to be useful. As such, the method of attaching the monitoring device to the pneumatic tire should minimize any manual steps or steps that require precise component manipulation.

#### SUMMARY OF THE INVENTION

[0008] In view of the foregoing, it is an objective of the present invention to provide an attachment that may be used to connect a monitoring device to the inner surface of a pneumatic tire that overcomes each of the problems experienced in the art.

[0009] Another objective of the present invention is to provide an attachment that maintains the connection between the monitoring device and the tire when the tire experiences predictable rotational and shock forces.

[0010] Still another objective of the present invention is to provide an attachment for connecting a monitoring device to a pneumatic tire that is lightweight so that the tire does not have to be excessively counterbal-

anced.

[0011] Yet another objective of the present invention is to provide an attachment for connecting a monitoring device to the interior of a pneumatic tire that accommodates the stretching and movement of the inner surface of the pneumatic tire.

[0012] A further objective of the present invention is to provide a method for attaching a monitoring device to the interior surface of a pneumatic tire that is easy to perform and may be performed by automated machinery in a tire manufacturing line.

[0013] A further objective of the present invention is to provide a method for attaching a monitoring device to the inner surface of a pneumatic tire that may be used at a variety of locations inside the pneumatic tire.

[0014] A further objective of the present invention is to provide a method for attaching a monitoring device to the inner surface of a pneumatic tire that does not require additional structural elements to be inserted into the tire or attached to the tire to secure the monitoring device.

[0015] An additional objective of the present invention is to provide an attachment and method for attaching a monitoring device to the interior surface of a pneumatic tire that is of simple construction, that achieves the stated objectives in a simple, effective, and inexpensive manner, that solves the problems, and that satisfies the needs existing in the art.

[0016] These and other objectives and advantages of the present invention are achieved by an attachment that includes an adhesive characterized by high viscosity at room temperature and capable of curing at 100° C and lower, the adhesive adhering a monitoring device to the innerliner of a pneumatic article where the innerliner is at least 0.06 inch thick.

[0017] Other objectives of the present invention are achieved by a method for adhering a monitoring device to a tire including the steps of selecting a portion of the innerliner of the tire where the monitoring device will be connected; roughening the selected portion of the innerliner, applying an adhesive to at least one of the monitoring device and roughened portion; placing a monitoring device on the roughened portion of the innerliner; and curing the adhesive.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0018] The preferred embodiment of the invention, illustrative of the best mode in which Applicants contemplated applying the principles of the invention, is set forth in the following description and is shown in the drawings and is particularly and distinctly pointed out and set forth in the appended claims.

Fig. 1 is a sectional view of a pneumatic tire with a monitoring device attached to the innerliner of the pneumatic tire by the method of the present invention;

Fig. 2 is a perspective view of a monitoring device attached to the innerliner of the pneumatic tire by the method of the present invention;

Fig. 3 is a perspective view of the monitoring device lifted away from the innerliner to show the treatment of the innerliner and the monitoring device according to the concepts of the present invention;

Fig. 4 is a plan view of an unencapsulated monitoring device; and

Fig. 5 is an enlarged sectional view similar to Fig. 1 showing an encapsulated monitoring device attached to the innerliner of a pneumatic tire.

[0019] Similar numbers refer to similar elements throughout the specification.

#### **DESCRIPTION OF THE PREFERRED EMBODIMENT**

[0020] A pneumatic article in the nature of a vehicle tire is depicted in the drawings and is indicated generally by the numeral 10. Tire 10 is of known construction and includes a pair of sidewalls 12 which extend outwardly from a pair of bead rings 14. A tread package 16 is located at the outer ends of sidewalls 12. Tire 10 further includes a plurality of cords or belts 18 that provide structural strength to tire 10. Tire 10 is supported on a rim 20 in a manner that provides an inner chamber 22 between tire 10 and rim 20. Inner chamber 22 is filled with pressurized air when tire 10 is in use to allow tire 10 to support the weight of the vehicle on which tire 10 is used. The pressurized air in chamber 22 is maintained in tire 10 by an innerliner 24 that is substantially impervious to air. Innerliner 24 is of known construction and includes not only butyl rubber but also chloro-butyl rubber, bromo-butyl rubber, and combinations thereof with up to less than 50% natural rubber. It is known in the tire building art that it is difficult to bond to innerliner 24.

[0021] The body of tire 10 is formed from a flexible and somewhat compliant rubber that flexes and stretches when tire 10 is in use. The movement of tire 10 is also transferred to innerliner 24 complicating the problem of bonding an article to the inner surface 26 of innerliner 24. The structure of tire 10 results in areas of tire 10 that flex more than other areas of tire 10. The areas that flex the least are the areas closest to rim 20. These areas are the low flex areas 28 that extend approximately 25% up sidewalls 12 and in some tire 10 configurations extends up to 50% of the height of sidewall 12. In most tire 10 configurations, low flex area 28 is 25% of the height of sidewalls 12.

[0022] It is also known in the art that innerliner 24 is formed in different thicknesses for different tires 10. The thickest innerliners 24 are used on off-the-road tires that are used with large vehicles. The thickness of off-the-road innerliners 24 are typically greater than at least

0.06 inch and are frequently greater than 1/4 of an inch. Many truck and bus radial tires have innerliners greater than at least 0.06 inch whereas most passenger tires have an innerliner 24 that is less than 0.06 inch thick.

[0023] An objective of the present invention is to provide an attachment 30 that may be used to connect a monitoring device 32 to innerliner 24 of tire 10 in a manner that securely holds monitoring device 32 in position when tire 10 is used throughout the life of tire 10. Monitoring device 32 may be any of a variety of monitoring devices known in the art. In the embodiment of the invention depicted in the drawings, monitoring device 32 is an active electronic monitoring device that includes a microprocessor 34, a pressure sensor 36, and a battery 38 such as shown and described in U.S. Patent Nos. 5,562,787, 5,573,611, 5,500,065, and 5,573,610, the contents of which are incorporated herein by reference. Each of these elements may be supported on a board or substrate 40 and connected to an antenna 42. It is desired in the art to encapsulate monitoring device 32 in a structurally stable housing 44 that may be a substantially rigid epoxy. Monitoring device 32 includes a bottom surface 46 that is used to bond monitoring device 32 to inner surface 26 of innerliner 24.

[0024] In accordance with another objective of the present invention, the method of attaching monitoring device 32 to innerliner 24 includes the following steps. A location on innerliner 24 in low flex area 28 is first selected to connect monitoring device 32. The selected location is first roughened to provide a roughened surface 50 that will accept the adhesive used in the present invention. This roughening may be performed by a buffing tool such as a tungsten carbide tool, sand blasting or by a variety of other known tools. Inner surface 26 of innerliner 24 is roughened by removing about 1 mil of material but preferably about 2 mils to remove the cure skin of innerliner 24 that is formed when tire 10 is cured. Roughened area 50 is then cleaned with an innerliner cleaner or a rubber cleaner such as cleaner fluid order no. 16-480 supplied by Patch Rubber Company a division of Myers industries, Akron, Ohio. The cleaner may also be any degreasing solvent such as a 1, 1, 2-trichloroethylene or heptane.

[0025] Roughened area 50 is then primed with a positive chlorine compound such as any chlorinated primer. A 3% trichlorotriazinetrione solution in butyl acetate is preferred.

[0026] Generally, any conventional rubber primer known to the art and to the literature can be utilized. Heretofore, typically chlorine or chlorine-containing compounds have been utilized to prime rubber. That is, a halogen or preferably a chlorine donor compound is utilized. A preferred rubber primer of the present invention is trichlorotriazinetrione which can be applied to the rubber as by brushing, spraying, etc., desirably in a multiplicity of coats. For example, a 3 percent trichlorotriazinetrione solution in butyl acetate can be applied in a

plurality of coatings such as three, allowing several minutes, e.g., 5 minutes drying time between coatings. Immediately after application of the last coating, its surface can be wiped off with RYMPLECLOTH® to remove by-products such as oils which migrate to the surface. The rubber surface can then be allowed to dry at ambient temperature for about 10 to 15 minutes.

[0027] Other rubber primers include the various N-halohydantoins, the various N-haloamides, the various N-haloimides, and combinations thereof. Examples of various desirable N-halohydantoins include 1,3-dichloro-5, 5-dimethyl hydantoin; 1,3-dibromo-5, 5-dimethyl hydantoin; 1,3-dichloro-5-methyl-5-isobutyl hydantoin; and 1,3-dichloro-5-methyl-5-hexyl hydantoin. Examples of N-haloamides include N-bromoacetamide and tetrachloroglycoluril. Examples of N-haloimides include N-bromosuccinimide and the various chloro substituted s-triazinetriones, commonly known as mono-, di-, and trichloroisocyanuric acid. The various mono-, di-, or tri-chloroisocyanuric acids, or combinations thereof are a preferred rubber primer with trichloroisocyanuric acid being especially preferred. A three percent by weight trichloroisocyanuric acid solution in butyl acetate is available from Lord Corporation as Chemlok 7707.

[0028] The various N-halohydantoins, N-haloamides, and N-haloimide rubber primers usually exist in solid form. They are readily soluble in polarsolvent such as acetone and can be applied in liquid form. Application of these rubber primers generally occur at ambient temperatures. Application can be in any conventional manner as through brushing, spraying, and the like. A typical amount of the N-halohydantoins, N-haloamides, and N-haloimide primer in the solvent, for example, ethyl acetate or acetone, is generally from about 0.1 to about 10 percent by weight based upon the total weight of said rubber primer and solvent, and preferably is from about 0.5 percent to about 5 percent. Of course, higher or lower concentrations can be utilized. This solvent system has been found to dry within a matter of minutes so that the adhesive can be applied shortly thereafter. It is thought that the rubber primer adds halogen groups, for example, chlorine to the cured rubber bead which activates the surface thereof, allowing the adhesive to adhere strongly to the cured rubber surface. Still additional rubber primers include various acetamides such as chloroacetamide, bromoacetamide, iodoacetamide, and the like. The thickness of the rubber primer layer can vary greatly and often is thin since it reacts with the rubber.

[0029] The primer 48 is allowed to dry thoroughly on area 50 before monitoring device 32 is bonded to innerliner 24. Bottom surface 46 of monitoring device 32 is then degreased using acetone on a purified cheesecloth such as RYMPLECLOTH® brand, sold by American Fiber and Finishing, Inc. of Westford, MA, and may also be textured to increase its surface area and ability to bond.

[0030] Monitoring device 32 is then bonded to area 50 using a suitable adhesive 52. A preferred adhesive 52 is an epoxy adhesive such as the FUSOR® 310B/320 adhesive that is available from Lord Corporation of Cary, NC. Adhesive 52 is generally characterized as having a high viscosity at room temperature and capable of curing at temperatures of 100°C or lower. Adhesive 52 generally consists of essentially epoxy and amine having a ratio of 2.5 parts epoxy to one part amine curative. Adhesive 52 may be spread on bottom surface 46 and area 50. Monitoring device 32 is then placed on area 50 with sufficient pressure to squeeze excess adhesive 52 out from under monitoring device 32. The excess adhesive 52 is removed and monitoring device is held in place by a suitable device such as a clamp or a piece of tape (not shown). Monitoring device 32 is held in place and adhesive 52 is allowed to cure for 16 to 24 hours. When a faster cure is desired, heat can be applied to decrease the cure period. Adhesive 52 is substantially rigid when it cures.

[0031] Rigid cured adhesives are not generally compatible with areas of tire 10 that move and flex when tire 10 is used. The above adhesive attachment system functions best when innerliner 24 is thick enough to allow inner surface 26 thereof to form a rigid bond with adhesive 52. Innerliners 24 on off-the-road tires 10 and on many truck and bus tires are typically thick enough to allow attachment 30 to properly function. The rigid bond is not disturbed or broken when tire 10 and innerliner 24 flex as a result of forces on tire 10 because of the thickness of innerliner 24. As can be perhaps best seen in Fig. 5, a significant portion 54 of innerliner 24 remains intact between roughened portion 50 and the body of tire 10. Innerliner portion 54 flexes with tire 10 and functions as a buffer that accommodates the flexing and movement of tire 10 without breaking the bond between adhesive 52 and innerliner 24. This accommodation is possible because innerliner 24 is thick in off-the-road and on certain truck and bus tires 10. When the thickness of portion 54 of innerliner 24 is decreased, the flex and movement of the body of tire 10 have a better chance of breaking the rigid adhesive 52 that connects monitoring device 32 to innerliner 24. When attachment 30 of the present invention is used on innerliner 24 of an off-the-road or truck and bus tires, innerliner portion 54 flexes enough throughout the life of tire 10 to prevent the bond between adhesive 52 and innerliner 24 from breaking throughout the life of tire 10.

[0032] Attachment 30 may also be used to connect monitoring device 32 to a different location on tire 10 such as the top surface 60 of tire 10 as depicted in the dashed lines shown in Fig. 1. A monitoring device 32 may be attached to top surface 60 when the configuration of tire 10 results in top portion 60 having low flex properties.

[0033] Attachment 30 thus achieves the objectives of the present invention by providing a lightweight attachment that securely attaches monitoring device 32

to innerliner 24 throughout the life of tire 10. Tire 10 thus does not have to be excessively counterbalanced because attachment 30 is lightweight. Attachment 30 may also be easily created by automated equipment on an existing automated tire manufacturing line because attachment 30 does not require additional structural elements to be added to tire 10 or monitoring device 32 such as the flaps of the prior art that cover monitoring device 32 to hold monitoring device 32 in a pocket. Likewise, attachment 30 further does not require monitoring device 32 to be embedded within the body of tire 10.

[0034] Accordingly, the improved attachment for connecting a monitoring device 32 to innerliner 24 of tire 10 is simplified, provides an effective, safe, inexpensive, and efficient device which achieves all the enumerated objectives, provides for eliminating difficulties encountered with prior devices, and solves problems and obtains new results in the art.

[0035] In the foregoing description, certain terms have been used for brevity, clearness, and understanding; but no unnecessary limitations are to be implied therefrom beyond the requirement of the prior art, because such terms are used for descriptive purposes and are intended to be broadly construed.

[0036] Moreover, the description and illustration of the invention is by way of example, and the scope of the invention is not limited to the exact details shown or described.

[0037] Having now described the features, discoveries, and principles of the invention, the manner in which the attachment of the present invention is constructed and used, the characteristics of the construction, and the advantageous new and useful results obtained; the new and useful structures, devices, elements, arrangements, parts, and combinations are set forth in the appended claims.

## Claims

### 1. A device comprising:

a pneumatic article having an inner chamber, the inner chamber being lined with an innerliner; said innerliner being at least about 0.06 inch thick;

a monitoring device having a bottom surface; an adhesive compatible with the surface of the innerliner and the bottom surface of the monitoring device, the adhesive characterized by high viscosity at room temperature and capable of curing at 100°C and lower, said adhesive adhering said monitoring device to the innerliner of the pneumatic article.

### 2. The device of claim 1 wherein the pneumatic article is an off-the-road, truck or bus tire.

### 3. The device of claim 2 wherein the adhesive is an

amine-cured epoxy.

lated monitoring device.

4. The adhesive of claim 3 wherein the adhesive includes epoxy and amine curative having a ratio of 2.5 parts epoxy to one part amine curative. 5
5. The device of claim 1 wherein the monitoring device is encapsulated with an epoxy to provide an encapsulated monitoring device having a bottom surface, said bottom surface being adhered to the innerliner. 10
6. The device of claim 5 wherein the monitoring device is an active electronic monitoring device.
7. The device of claim 6 wherein the active electronic monitoring device includes a microprocessor, a pressure sensor, and a battery. 15
8. The device of claim 5 wherein the bottom surface of the encapsulated monitoring device is textured to increase the surface area. 20
9. The device of claim 1 wherein the inner surface of the innerliner at which the monitoring device is adhered to is roughened. 25
10. The device of claim 9 wherein the adhesive substantially rigidly bonds to the roughened surface of the innerliner allowing the innerliner to flex without breaking the bond of the adhesive. 30
11. The device of claim 10 wherein the monitoring device is located at a low flex area of the pneumatic device.
12. The device of claim 11 wherein the innerliner is at least 1/8 inch thick. 35
13. A method for adhering a monitoring device to a tire comprising the steps of: 40
  - selecting a portion of the innerliner of the tire where the monitoring device will be connected; roughening the selected portion of the innerliner;
  - applying an adhesive to at least one of the monitoring device and roughened portion;
  - placing the monitoring device on the roughened portion of the innerliner; and
  - curing the adhesive. 45
14. The method of claim 13 further comprising the step of encapsulating the monitoring device with an encapsulation material to provide a bottom surface to the encapsulated monitoring device. 50
15. The method of claim 14 further comprising the step of roughening the bottom surface of the encapsu- 55
16. The method of claim 13 wherein the step of roughening the selected portion includes the step of buffing the innerliner.
17. The method of claim 16 wherein the step of roughening includes the step of removing the cure skin of the innerliner.
18. The method of claim 17 wherein the step of removing the cure skin includes the step of removing about 1 mil of thickness from the innerliner.
19. The method of claim 13 further comprising the step of cleaning the roughened portion of the innerliner with a rubber cleaner.
20. The method of claim 19 further comprising the steps of cleaning the monitoring device with a solvent and allowing the monitoring device to dry.
21. The method of claim 20 further comprising the step of priming the roughened portion of the innerliner.
22. The method of claim 21 wherein the step of priming includes the step of priming with a chlorinated primer.
23. The method of claim 22 where the step of priming with a chlorinated primer includes the step of using a three percent solution of trichlorotriazinetrione and butyl acetate.
24. The method of claim 13 wherein the step of applying adhesive to the monitoring device includes the steps of applying a two-part epoxy adhesive. 35
25. The method of claim 13 wherein the step of applying the adhesive includes the step of applying a Fusor system adhesive. 40
26. The method of claim 13 further comprising the step of applying pressure to the monitoring device to firmly hold the monitoring device against the roughened portion during the curing of the adhesive. 45
27. The method of claim 26 wherein the step of curing includes the step of allowing the adhesive to cure for at least 24 hours. 50
28. The method of claim 26 wherein the step of curing includes the step of applying heat to the adhesive.
29. The method of claim 13 wherein the step of selecting a portion of the innerliner includes the steps of selecting a portion of the innerliner in a low flex area of the tire.

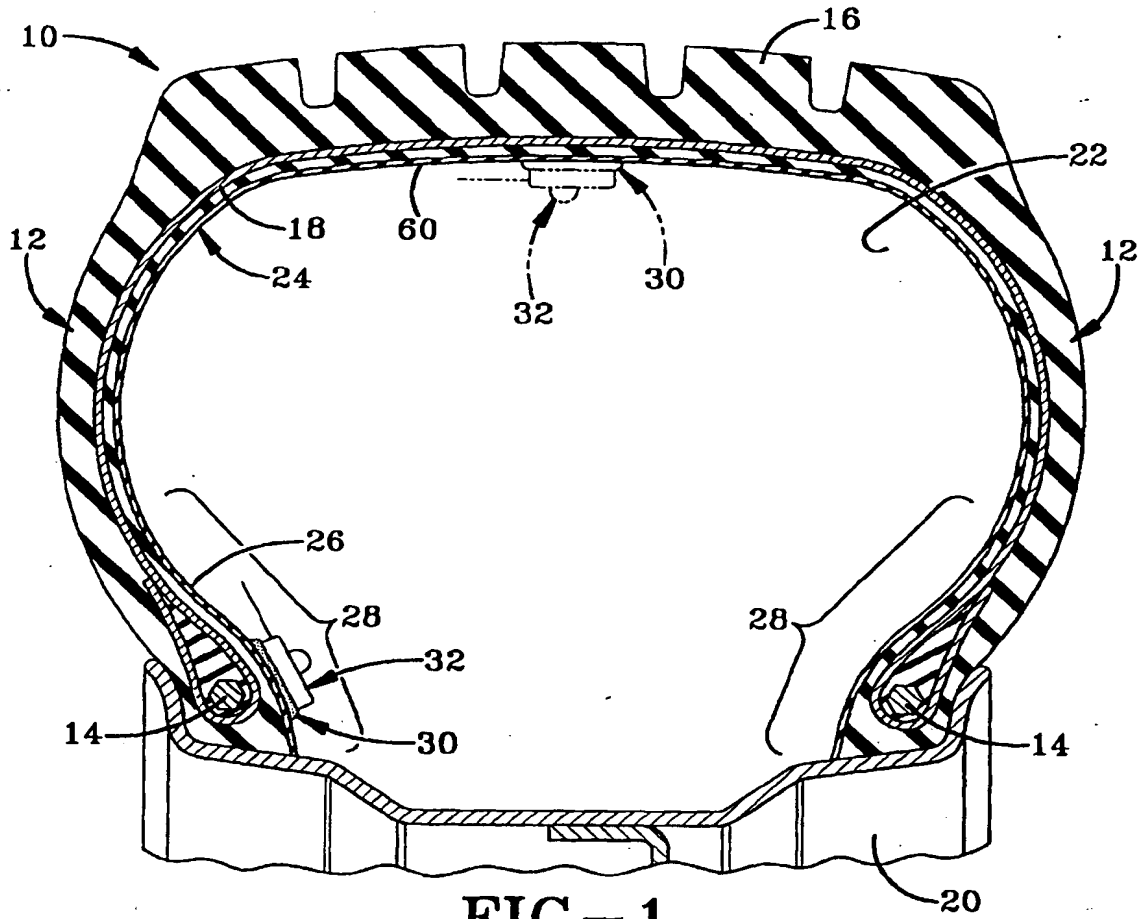


FIG-1

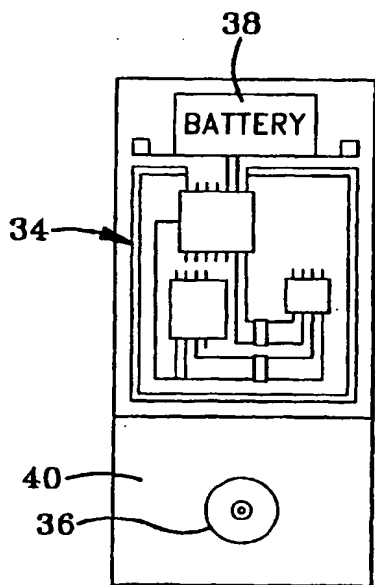


FIG-4




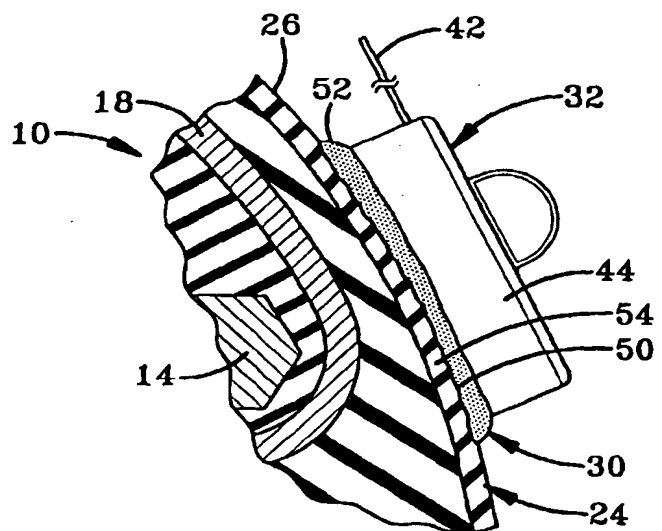


FIG-5

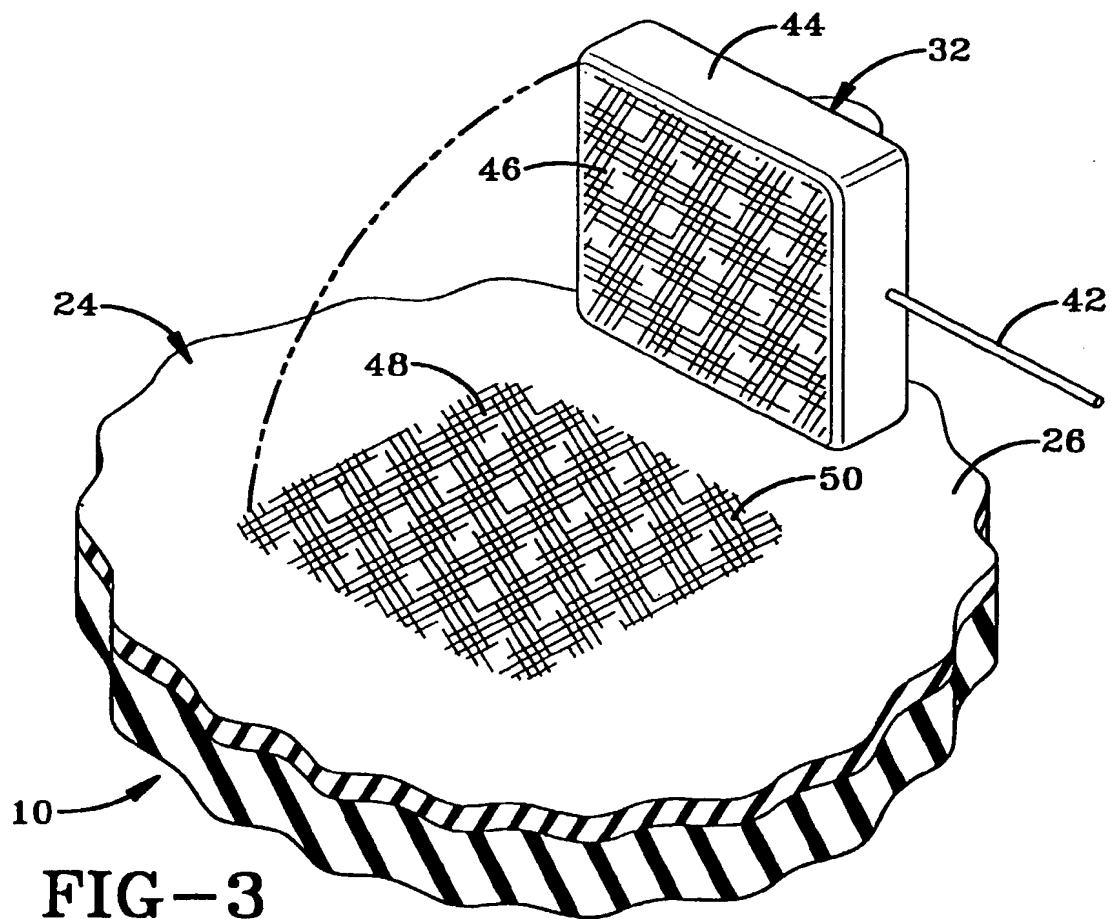

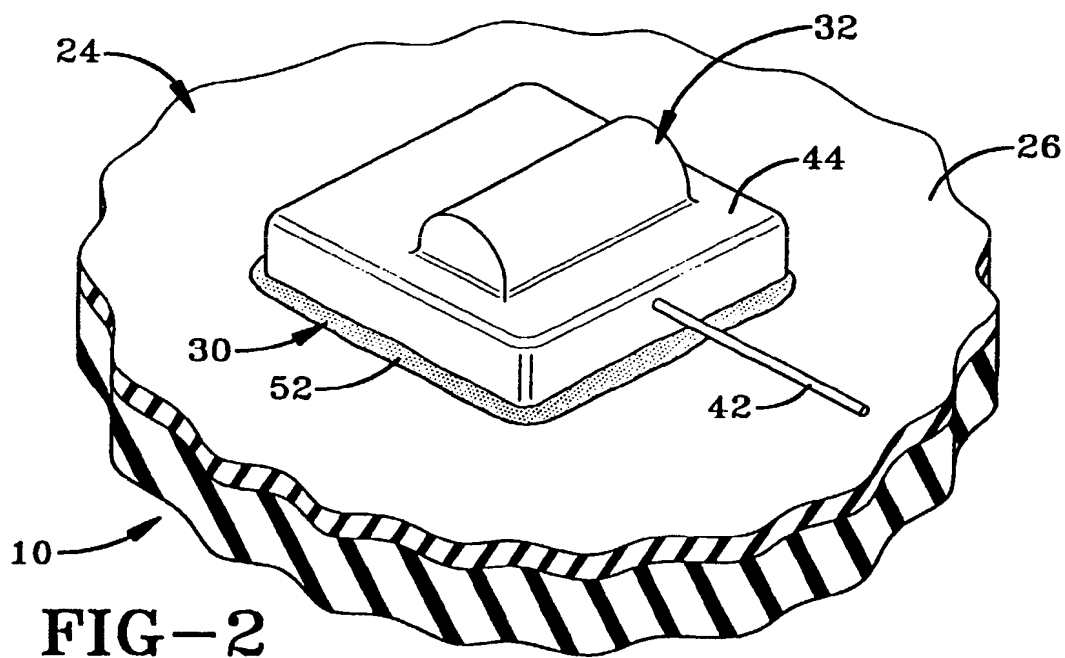



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 006 010 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
20.11.2002 Bulletin 2002/47

(51) Int Cl.7: **B60C 23/04**

(43) Date of publication A2:  
07.06.2000 Bulletin 2000/23

(21) Application number: **99121847.0**

(22) Date of filing: **04.11.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Koch, Russell W.**  
Hartville OH 44632 (US)  
• **Wilson, Paul B.**  
Murfreesboro TN 37129 (US)

(30) Priority: **04.12.1998 US 206042**


(71) Applicant: **Bridgestone/Firestone North  
American Tire LLC**  
Nashville, Tennessee 37214 (US)

(74) Representative: **Fleck, Thomas, Dr. Dipl.-Chem.  
Raffay & Fleck**  
Patentanwälte  
Geffckenstrasse 6  
20249 Hamburg (DE)

### (54) Method of attaching sensitive electronic equipment to the inner surface of a tire

(57) An attachment (30) between a monitoring device (32) and an innerliner of a tire (10) includes the use of an epoxy adhesive that bonds the monitoring device (32) directly to the inner surface (26) of the innerliner (24) of the tire. The innerliner (24) is first roughened in a manner that provides a roughened portion of the innerliner without removing the entire thickness of the innerliner. The entire thickness of the innerliner is not re-

moved because the innerliner is preferably more than 1/16 of an inch thick. The thickness of the innerliner allows the rigid cured epoxy to bond the monitoring device to the inner surface of the innerliner while allowing the innerliner to flex with the tire so as to not break the seal between the rigid epoxy and the innerliner. The monitoring device is preferably located at a low flex area (28) of the tire to help avoid the problem of the innerliner flexing.

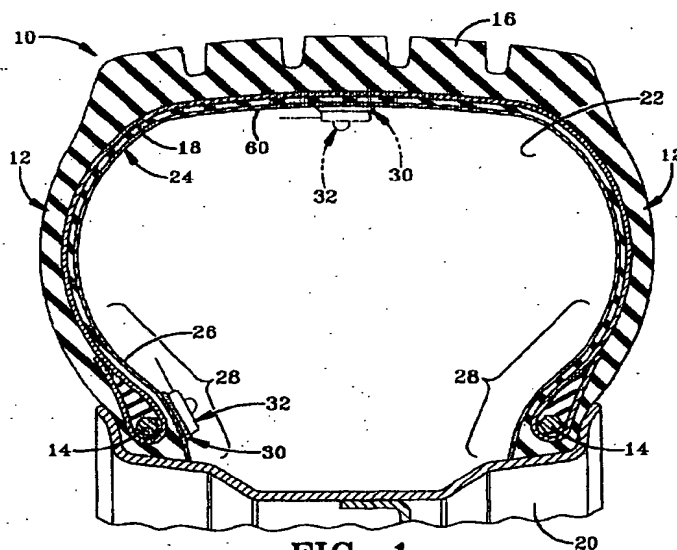

**FIG-1**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 12 1847

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 573 611 A (OKAMOTO KEIZO ET AL) 12 November 1996 (1996-11-12)  * column 5, line 29 - column 7, line 29; figures 6-11 * * column 4, line 25 - line 53 * * column 2, line 39 - line 46 *	1-3, 5-7, 9, 13-16, 19-21, 24, 26-29	B60C23/04
A	-----	4, 8, 10, 17, 22, 25	
A	US 5 462 617 A (BENDER DAVID L ET AL) 31 October 1995 (1995-10-31)  * the whole document * -----	1, 9, 13, 15, 16, 19-21, 24, 26-28	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)  B60C
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>18 September 2002</b>	Examiner <b>Smeyers, H</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/92 (P24C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 12 1847

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-09-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5573611 A	12-11-1996	US 5500065 A	19-03-1996
		AU 694200 B2	16-07-1998
		AU 2030295 A	14-12-1995
		AU 703974 B2	01-04-1999
		AU 6596998 A	16-07-1998
		BR 9502667 A	02-01-1996
		CA 2150865 A1	04-12-1995
		DE 69509305 D1	02-06-1999
		DE 69509305 T2	02-09-1999
		EP 0689950 A2	03-01-1996
		ES 2130524 T3	01-07-1999
		JP 8067117 A	12-03-1996
		NZ 272255 A	26-06-1998
		NZ 330236 A	26-06-1998
		NZ 330237 A	26-06-1998
		NZ 330238 A	28-07-1998
		US 5573610 A	12-11-1996
		US 5562787 A	08-10-1996
		ZA 9504299 A	24-01-1996
US 5462617 A	31-10-1995	NONE	

EPO FORM P4489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IT 02/00447

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B60C23/04 B60C23/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 006 010 A (BRIDGESTONE FIRESTONE INC) 7 June 2000 (2000-06-07) abstract; claims	1,12
A	US 5 562 787 A (OKAMOTO KEIZO ET AL) 8 October 1996 (1996-10-08) cited in the application column 6, line 28 -column 7, line 53; figure 15	1,12

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

6 February 2003

Date of mailing of the international search report

03/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan, 1  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo n:  
Fax: (+31-70) 340-3016

Authorized office:

Vessière, F

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 02/00447

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1006010	A	07-06-2000	US 6309494 B1	30-10-2001
			BR 9907420 A	26-09-2000
			EP 1006010 A2	07-06-2000
			JP 2000168320 A	20-06-2000
			KR 2000047579 A	25-07-2000
			US 2001045250 A1	29-11-2001
			ZA 9906732 A	15-05-2000
<hr/>				
US 5562787	A	08-10-1996	US 5500065 A	19-03-1996
			AU 694200 B2	16-07-1998
			AU 2030295 A	14-12-1995
			AU 703974 B2	01-04-1999
			AU 6596998 A	16-07-1998
			BR 9502667 A	02-01-1996
			CA 2150865 A1	04-12-1995
			DE 69509305 D1	02-06-1999
			DE 69509305 T2	02-09-1999
			EP 0689950 A2	03-01-1996
			ES 2130524 T3	01-07-1999
			JP 8067117 A	12-03-1996
			NZ 272255 A	26-06-1998
			NZ 330236 A	26-06-1998
			NZ 330237 A	26-06-1998
			NZ 330238 A	28-07-1998
			US 5573610 A	12-11-1996
			US 5573611 A	12-11-1996
			ZA 9504299 A	24-01-1996
<hr/>				

**THIS PAGE BLANK (USPTO)**